



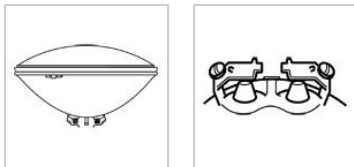

GE
Lighting

32861 - Q20A/PAR56/2

GE PAR56 - Airport & Airfield

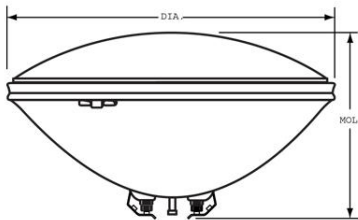

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Screw Terminals
Filament	CC-6
Rated Life (NOM)	500.0 h
Primary Application	Airport & Airfield

PHOTOMETRIC CHARACTERISTICS

Center Beam Candlepower (CBCP) (NOM)	200000.0
--------------------------------------	----------

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	300.0
Burn Position	Universal burning position

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.500 in(114.3 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	32861
Description	Q20A/PAR56/2
Standard Package	Case
Standard Package GTIN	10043168328613
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168328616

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.
 - Avoid direct water/liquid contact.