




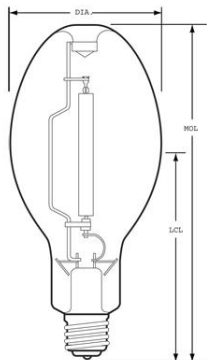

GE
Lighting

76998 - LU400/D/H/ECO

GE Lucalox® High Pressure Sodium ED37

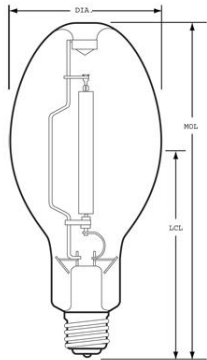

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium
Bulb	ED37
Base	Mogul Screw (E39)
Bulb Finish	Diffuse
Rated Life (MIN)	24000.0 h
Rated Life (NOM)	24000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Mercury Content (NOM)	15.84 mg
Picograms of Mercury (NOM)	15.4 pg
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	47500.0
Mean Lumens (NOM)	42750.0
Nominal Initial Lumens per Watt (NOM)	118.75
Color Temperature (NOM)	2100.0 K
Color Rendering Index (CRI) (NOM)	22.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	400.0
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	198.0 V
Warm Up Time to 90% (MIN)	3.0 min
Warm Up Time to 90% (MAX)	4.0 min
Hot Restart Time to 90% (MAX)	1.0 min

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	11.310 in(287.3 mm)
Nominal Length (NOM)	11.310 in(287.3 mm)
Bulb Diameter (DIA) (NOM)	4.625 in(117.5 mm)
Light Center Length (LCL) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	76998
Description	LU400/D/H/ECO
ANSI Code	S51
Standard Package	Case
Standard Package GTIN	10043168769980
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168769983

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not store flammable materials near/below lamp.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Use only properly rated ballast.

For additional information, visit www.gelighting.com

- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- Contains sodium – chemical burn risk
 - Avoid skin contact with broken pieces.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

