





GE
Lighting

47261 - 100A/RS/STGPQ1/6

GE saf-t-gard® 100 watt A21 1-pack

- GE's specialty bulbs offer innovative solutions for a variety of lighting needs.
- Shatter Resistant Bulb - Protective coating helps contain glass fragments if broken.
- 120 volts
- 2800K soft white light appearance
- A21 shape with medium base for use in rough service applications
- Estimated yearly energy costs \$12.05 based on 3 hours per day \$0.11 per kWh
- GE saf-t-gard® bulbs feature a protective Teflon® coating that helps contain glass fragments if broken. Designed with heavy-duty, all-weather construction, these bulbs protect against shattering, rain breakage and splatter from oil and lubricants. GE saf-t-gard® bulbs are perfect for home use in kitchens, basements garages, workshops and enclosed exterior fixtures
- Lasts .9 years based on 3 hours per day usage

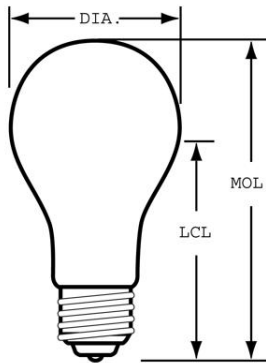

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - A-line
Bulb	A21
Base	Medium Screw (E26)
Filament	C-7A
Rated Life (NOM)	1000.0 h
Base Material	Brass
Primary Application	Shatter-Resistant; Rough Service

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1160.0
Nominal Initial Lumens per Watt (NOM)	11.6

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	100.0
Voltage (NOM)	120.0
Burn Position	Universal burning position

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.130 in(104.9 mm)
Bulb Diameter (DIA) (NOM)	2.625 in(66.7 mm)
Light Center Length (LCL) (NOM)	93.0 mm

PRODUCT INFORMATION

Product Code	47261
Description	100A/RS/STGPQ1/6
Standard Package	BUNDLE
Standard Package GTIN	00043168472616
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168904254

CAUTIONS & WARNINGS

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.

NOTES

- Lamp base is a brass base (BB).
- Will operate in any burning position, but fixed-socket usage other than base up or continuous burning in any position in ambient temperatures above 150 degrees F (66 degrees C), may result in some loss of protective coating. Reflectors and accessories may raise bulb temperature and cause some loss of protective coating.