



GE
Lighting



97576 - F9DBX23/827/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office;
Restaurant; Warehouse

Photo
Not Available

Rendering
Energy Savings

High Color



CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	G23-2
Equivalent Wattage (NOM)	30.0 W
Rated Life (NOM)	12000.0 h
Starting Temperature (MIN)	-4.0 °C
Cathode Resistance (NOM)	10.5 Ohm
Mercury Content (NOM)	3.0 mg
Picograms of Mercury (NOM)	531.9149 pg
Additional Info	TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;W

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	550.0
Mean Lumens (NOM)	470.0
Nominal Initial Lumens per Watt (NOM)	61.11111
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	9.0
Voltage (NOM)	59.0
Open Circuit Voltage Across Starter (MIN)	198.0 V
Lamp Current (NOM)	0.18 A
Current Crest Factor (MAX)	1.7
Supply Current Frequency (NOM)	60.0 Hz

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.300 in(109.2 mm)
Nominal Length (NOM)	4.300 in(109.2 mm)
Base Face to Top of Lamp (NOM)	3.460 in(87.9 mm)

PRODUCT INFORMATION

Product Code	97576
Description	F9DBX23/827/ECO
Standard Package	BUNDLE
Standard Package GTIN	
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168975766

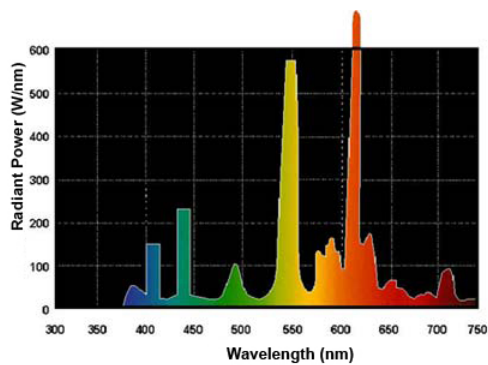

NOTES

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life