





GE  
Lighting

## 20708 - FLE15/2/R30/SWCD

### GE energy smart® CFL 15 watt R30 floodlight 1-pack

- \$55 in energy savings over the life of the bulb based on 3 hours per day usage
- Energy Star Qualified
- Estimated yearly energy costs \$1.81 based on 3 hours per day \$0.11 per kWh
- Lasts 9.1 years based on 3 hours per day usage
- R30 indoor floodlight with medium base for use in directional fixtures such as recessed can lighting
- The GE energy smart® indoor floodlight CFLs feature a GE Spiral® bulb on the inside that uses 75% less energy and lasts up to 5 times longer than incandescent indoor reflectors. These bulbs' funnel shape help direct light where it is needed better than a standard CFL or incandescent bulb. Use GE energy smart® indoor floodlight CFLs in indoor recessed track and recessed fixtures to create broad beams of light in any room or space
- 65 watt replacement uses only 15 watts

a product of  
**ecomagination**

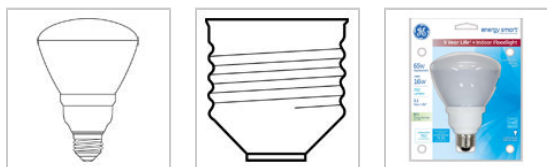

## GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	R30
Base	Medium Screw (E26)
Bulb Finish	Soft white
Equivalent Wattage (NOM)	65.0 W
Rated Life (NOM)	8000.0 h
Starting Temperature (MIN)	-15.0 °C
Total Harmonic Distortion (THD) (NOM)	120.0 %
Life in Years (NOM)	9.1
Mercury Content (NOM)	3.5 mg
Picograms of Mercury (NOM)	774.3 pg
Primary Application	Indoor Floodlight;Facilities;Retail Display;Hospitality;Office;Restaurant

## PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	700.0 /750.0
Mean Lumens (NOM)	565.0
Nominal Initial Lumens per Watt (NOM)	46.66667
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

## ELECTRICAL CHARACTERISTICS

Wattage (NOM)	16.0
Voltage (NOM)	120.0
Input Voltage (NOM)	120.0 V
Estimated Energy Cost per Year (NOM)	1.93
Input Current (NOM)	0.22 A
Power Factor (NOM)	0.6

## DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.400 in(137.2 mm)
Nominal Length (NOM)	5.400 in(137.2 mm)

## PRODUCT INFORMATION

Product Code	20708
Description	FLE15/2/R30/SWCD
Standard Package	BUNDLE
Standard Package GTIN	00043168207089
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168498975

## CAUTIONS & WARNINGS

### Warning

- Risk of Electric Shock
  - Do not open - no user serviceable parts inside.
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.

## NOTES

- Best performance if operated base up and at 77 degrees F (25C) ambient temperature.
- Fluorescent lamp lumens decline during life
- Lumens on one piece self ballasted lamp systems are measured base up.
- Use only on 120V 60 Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.