




GE
Lighting

10183 - F15T12/CW 6PK

GE garage & basement 15 watt T12 1-pack

- Ideal for utility use
- Lasts 4.1 years based on 6 hours per day usage
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- 18 inches long

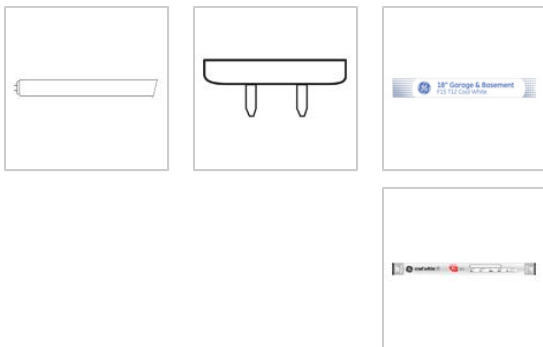

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- *Four year life based on rated life at 6 hours/day.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T12
Rated Life (NOM)	Medium Bi-Pin (G13)
Bulb Material	9000.0 h
Starting Temperature (MIN)	Soda lime
Mercury Content (NOM)	10.0 °C
Picograms of Mercury (NOM)	60.0 mg
Primary Application	9732.4 pg
	Garage & Basement

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	760.0
Mean Lumens (NOM)	685.0
Nominal Initial Lumens per Watt (NOM)	50.66667
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	15.0
Open Circuit Voltage (rapid start) (MAX)	210.0 V
Open Circuit Voltage (after preheating) Max @ Temperature	220 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	108 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	157 V @ 10 °C
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	18.000 in(457.2 mm)
Minimum Overall Length (NOM)	17.670 in(448.8 mm)
Nominal Length (NOM)	18.000 in(457.2 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)
Max Base Face to Base Face (A) (NOM)	17.220 in(437.4 mm)
Face to End of Opposing Pin (B) (MIN)	17.400 in(442.0 mm)
Face to End of Opposing Pin (B) (MAX)	17.500 in(444.5 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	17.670 in(448.8 mm)

PRODUCT INFORMATION

Product Code	10183
Description	F15T12/CW 6PK
ANSI Code	2010-1
Standard Package	BUNDLE
Standard Package GTIN	00043168101837
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168980500

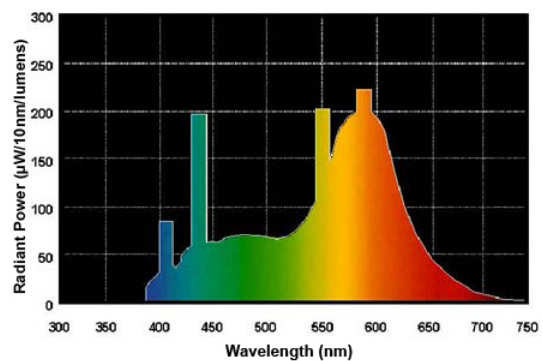

Graphs_Lamp Mortality

