




GE
Lighting

10231 - F20T12/B 6PK

GE T12 - Colored Lamp

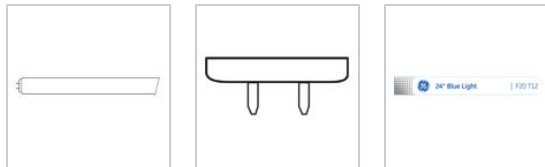

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

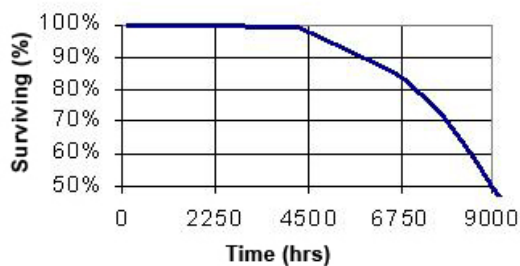

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T12
Bulb Finish	Medium Bi-Pin (G13)
Rated Life (NOM)	Blue
Rated Life (instant start) @ Time	9000.0 h
Starting Temperature (MIN)	9000 h @ 3 h
Mercury Content (NOM)	10.0 °C
Picograms of Mercury (NOM)	9.0 mg
Primary Application	3030.3 pg
	Colored Lamp;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	450.0
Mean Lumens (NOM)	330.0
Nominal Initial Lumens per Watt (NOM)	22.5

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	20.0
---------------	------

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	24.000 in(609.6 mm)
Nominal Length (NOM)	24.000 in(609.6 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)

PRODUCT INFORMATION

Product Code	10231
Description	F20T12/B 6PK
Standard Package	BUNDLE
Standard Package GTIN	30043168102316
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168102315