




GE
Lighting

17705 - F24T8/CW/4 6PK

GE garage & basement 18 watt T8 1-pack

- Passes TCLP, which can lower disposal costs.
- 1.0 inch diameter T8 with medium bi-pin (g13) base
- 24 inches long
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- Lasts 3.4 years based on 6 hours per day usage

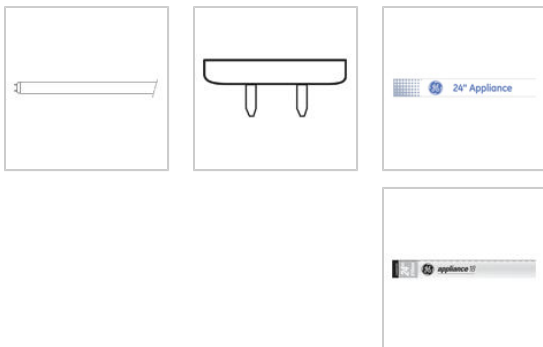

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

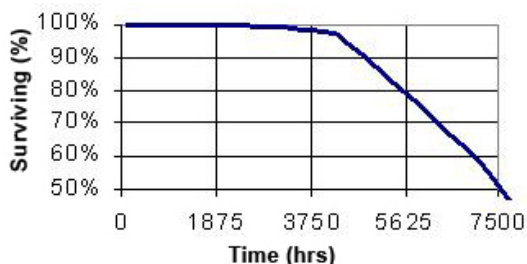

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	7500.0 h
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	18.0 mg
Picograms of Mercury (NOM)	2307.7 pg
Additional Info	TCLP compliant
Primary Application	Appliance;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1150.0
Mean Lumens (NOM)	1040.0
Nominal Initial Lumens per Watt (NOM)	63.88889
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	18.0
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	108 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Preheat Voltage (MIN)	4.25 V
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	24.000 in(609.6 mm)
Minimum Overall Length (NOM)	23.670 in(601.2 mm)
Nominal Length (NOM)	24.000 in(609.6 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Max Base Face to Base Face (A) (NOM)	23.220 in(589.8 mm)
Face to End of Opposing Pin (B) (MIN)	23.400 in(594.4 mm)
Face to End of Opposing Pin (B) (MAX)	23.500 in(596.9 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	23.670 in(601.2 mm)

PRODUCT INFORMATION

Product Code	17705
Description	F24T8/CW/4 6PK
ANSI Code	2011-1
Standard Package	BUNDLE
Standard Package GTIN	00043168177054
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168981477