



GE
Lighting


21325 - F20T12/KB/ECO

GE kitchen & bath 20 watt T12 1-pack

- For use in kitchens and baths
- Food looks fresher & skin tones are more attractive
- Passes TCLP, which can lower disposal costs.
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 24 inches long
- 3000K warm white light appearance
- For use in kitchens, bathrooms, and living areas
- GE kitchen & bath fluorescent bulbs deliver a warmer tone to create a comfortable and inviting atmosphere. These warm white bulbs are best for living areas throughout your home, hotels, commercial restrooms, reception areas and food preparation
- Lasts 4.1 years based on 6 hours per day usage
- Warm, inviting light that complements any decor



High Color Rendering

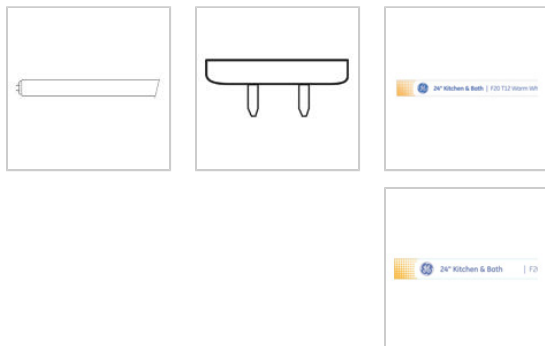

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
 - Avoid direct water/liquid contact.

*Four year life based on rated life at 6 hours/day.

GRAPHS & CHARTS

Graphs_Lamp Mortality

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T12
Rated Life (NOM)	Medium Bi-Pin (G13)
Bulb Material	9000.0 h
Starting Temperature (MIN)	Soda lime
Mercury Content (NOM)	10.0 °C
Picograms of Mercury (NOM)	4.95 mg
Additional Info	458.3 pg
Primary Application	TCLP compliant
	Kitchen & Bath

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1275.0
Mean Lumens (NOM)	1200.0
Nominal Initial Lumens per Watt (NOM)	63.75
Color Temperature (NOM)	3000.0 K
Color Rendering Index (CRI) (NOM)	70.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	20.0
Open Circuit Voltage (rapid start) (MAX)	220.0 V
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	157 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	24.000 in(609.6 mm)
Minimum Overall Length (NOM)	23.670 in(601.2 mm)
Nominal Length (NOM)	24.000 in(609.6 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)
Max Base Face to Base Face (A) (NOM)	23.220 in(589.8 mm)
Face to End of Opposing Pin (B) (MIN)	23.400 in(594.4 mm)
Face to End of Opposing Pin (B) (MAX)	23.500 in(596.9 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	23.670 in(601.2 mm)

PRODUCT INFORMATION

Product Code	21325
Description	F20T12/KB/ECO
ANSI Code	2015-1
Standard Package	BUNDLE
Standard Package GTIN	00043168213257
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168980708

