




GE
Lighting

10355 - F30T12/CW

GE T12 - Appliance

- Passes TCLP, which can lower disposal costs.

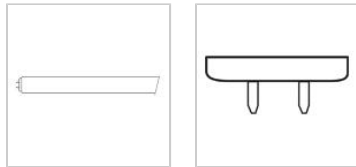

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

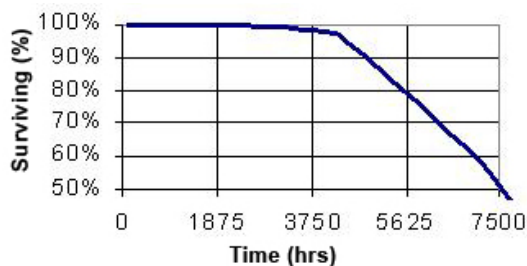

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	7500.0 h
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	60.0 mg
Picograms of Mercury (NOM)	6557.4 pg
Additional Info	TCLP compliant
Primary Application	Appliance;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1350.0
Mean Lumens (NOM)	1220.0
Nominal Initial Lumens per Watt (NOM)	64.28571
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	21.0
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	29.780 in(756.4 mm)
Minimum Overall Length (NOM)	29.670 in(753.6 mm)
Nominal Length (NOM)	30.000 in(762.0 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)
Face to End of Opposing Pin (B) (MIN)	29.400 in(746.8 mm)
Face to End of Opposing Pin (B) (MAX)	29.500 in(749.3 mm)

PRODUCT INFORMATION

Product Code	10355
Description	F30T12/CW
Standard Package	Case
Standard Package GTIN	00043168103558
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168981408