



GE
Lighting

23746 - F32T8XLSPX50ECVG

GE Ecolux® Long Life T8 - Shatter-Resistant



• A shatter resistant lamp encased in a 15 ml Lexan sleeve. Complies with FDA food code 6-202 and 21CFR 110.20. NSF and UL certified. Blocks UV lamp emissions from 380 to 180 nm.



High Color Rendering

Photo
Not Available

Circle E

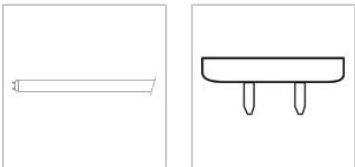

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	Medium Bi-Pin (G13)
Rated Life (instant start) @ Time	36000.0 h
Rated Life (rapid start) @ Time	25000 h @ 3 h
	36000 h @ 12 h
	36000.0 @ 3.0/42000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	2.95 mg
Additional Info	TCLP compliant
Primary Application	Shatter-Resistant;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2715.0
Mean Lumens (NOM)	2580.0
Nominal Initial Lumens per Watt (NOM)	84.84375
Color Temperature (NOM)	5000.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	32.0
---------------	------

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	48.000 in(1219.2 mm)
Nominal Length (NOM)	48.000 in(1219.2 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)

PRODUCT INFORMATION

Product Code	23746
Description	F32T8XLSPX50ECVG
Standard Package	Case
Standard Package GTIN	10043168237465
Standard Package Quantity	36
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	36
UPC	043168237468