



GE  
Lighting

## 17135 - F60T10/SP30

GE T10 - Cold Temperature

This product is no longer manufactured.



### GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T10
Base	Recessed Double Contact (R17d)
Rated Life (NOM)	6000.0 h
Rated Life (instant start) @ Time	6000 h @ 3 h
Bulb Material	Soda lime
Mercury Content (NOM)	90.0 mg
Picograms of Mercury (NOM)	1764.7 pg
Primary Application	Cold Temperature

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	8500.0
Nominal Initial Lumens per Watt (NOM)	62.96296
Color Temperature (NOM)	3000.0 K
Color Rendering Index (CRI) (NOM)	70.0

### ELECTRICAL CHARACTERISTICS


Wattage (NOM)	135.0
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	60.000 in(1524.0 mm)
Nominal Length (NOM)	60.000 in(1524.0 mm)
Bulb Diameter (DIA) (MAX)	1.340 in(34.0 mm)
Bulb Diameter (DIA) (NOM)	1.250 in(31.8 mm)

### PRODUCT INFORMATION

Product Code	17135
Description	F60T10/SP30
Standard Package	Case
Standard Package GTIN	10043168171356
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168171359

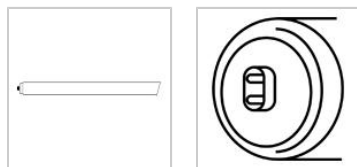

### CAUTIONS & WARNINGS

#### Caution


- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use excessive force when installing lamp.

#### Warning


- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.

### GRAPHS & CHARTS

#### Graphs\_Lamp Mortality

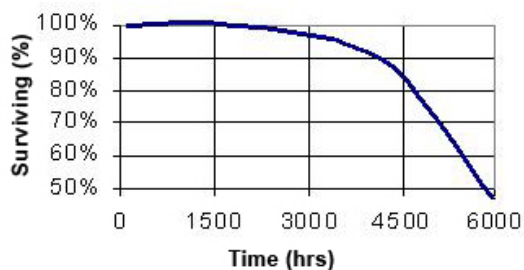

#### Graphs\_Temperature Curve

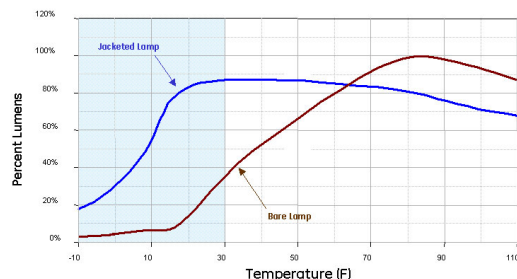

### NOTES

- Because Power Groove® and Very High Output lamps are most used in commercial applications, the life rating is based on 12 hrs. per start.

Apr 23, 2014 12:10:04 PM

For additional information, visit [www.gelighting.com](http://www.gelighting.com)