





GE
Lighting

45675 - CMH70PAR38SP/ECO

GE ConstantColor® CMH® Ceramic Metal Halide PAR38

- Passes TCLP, which can lower disposal costs.

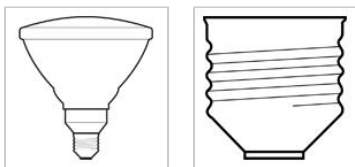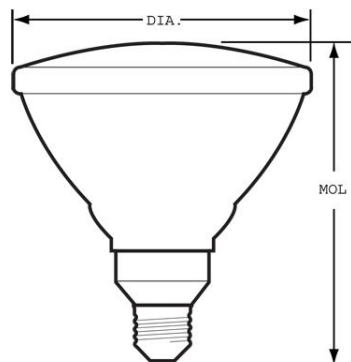

CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.

Warning

- Lamp emits UV radiation which may cause eye/skin irritation.
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Use only properly rated ballast.

NOTES

- Rated life based on 11 hours per start

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Ceramic Metal Halide
Bulb	PAR38
Base	Medium Screw (E26)
Bulb Finish	Clear
Rated Life (NOM)	10000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Base Temperature (MAX)	190.0 °C
Bulb Temperature (MAX)	350.0 °C
Mercury Content (NOM)	9.7 mg
Picograms of Mercury (NOM)	166.7 pg
Additional Info	TCLP compliant/UV control

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	4800.0
Nominal Initial Lumens per Watt (NOM)	68.57143
Beam Spread (NOM)	15.0 °
Center Beam Candlepower (CBCP) (NOM)	40000.0
Color Temperature (NOM)	3000.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	70.0
Burn Position	Universal burning position
Open Circuit Voltage (peak lead ballast) (MIN)	280.0 V
Open Circuit Voltage (RMS lag ballast) (MIN)	198.0 V
Warm Up Time to 90% (MAX)	2.0 min
Hot Restart Time to 90% (MIN)	10.0 min
Hot Restart Time to 90% (MAX)	15.0 min

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.280 in(134.1 mm)
Nominal Length (NOM)	5.310 in(134.9 mm)
Bulb Diameter (DIA) (NOM)	4.800 in(121.9 mm)

PRODUCT INFORMATION

Product Code	45675
Description	CMH70PAR38SP/ECO
ANSI Code	C98/M139/M143
Standard Package	Case
Standard Package GTIN	10043168456750
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168456753