



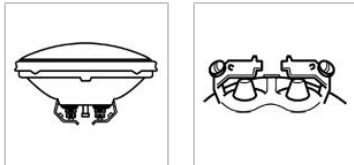

GE
Lighting

16542 - 50 PAR 36 VWFL

GE PAR36 - Very Wide Flood

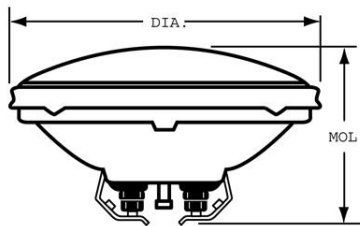

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	2000.0 h
Primary Application	Very Wide Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	330.0
Beam Spread - Horizontal	55.0 - 50.0 °
Beam Spread - Vertical	55.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	600.0
Max. Beam Candlepower (MBCP) (MAX)	600.0
Nominal Initial Lumens per Watt (NOM)	6.6

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	12.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	16542
Description	50 PAR 36 VWFL
Standard Package	Case
Standard Package GTIN	10043168165423
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168165426

NOTES

- Top end of bulb is opaque-coated to absorb upward light