





GE
Lighting

20577 - 240 PAR56 WFL

GE PAR56 - Wide Flood

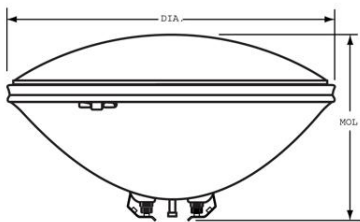

CAUTIONS & WARNINGS

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Use in enclosed fixture rated for this product.
 - Avoid direct water/liquid contact.

NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	2000.0 h
Primary Application	Wide Flood

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	50.0 - 10.0 °/35.0 - 50.0 °
Beam Spread - Vertical	27.0 - 10.0 °/18.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	13000.0
Color Temperature (NOM)	2800.0 K

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	240.0
Voltage (NOM)	12.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.500 in(114.3 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	20577
Description	240 PAR56 WFL
Standard Package	Case
Standard Package GTIN	10043168205778
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	043168205771