






GE
Lighting

12320 - 880/BP

GE T3.25 (T3 1/4) - Automotive

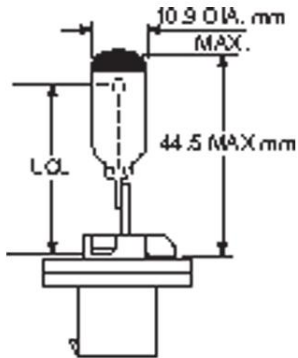

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Dispose of lamp in a closed container.
 - Do not exceed rated voltage.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Keep children away.
 - Use eye protection when handling lamp.
 - Use in enclosed fixture rated for this product.
 - Use protective screen when handling.

GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3.25 (T3 1/4)
Base	Axial Plastic (PG13)
Filament	C-6
Bulb Finish	Blacktop
Rated Life (NOM)	300.0 h
Bulb Material	Hard glass
Atmosphere	Gas-filled
Primary Application	Fog/Driving; Back up; Cornering

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	540.0
Nominal Initial Lumens per Watt (NOM)	20.0
Mean Spherical Candlepower (MSCP) (NOM)	43.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	27.0
Voltage (NOM)	12.8

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.680 in(68.1 mm)
Bulb Diameter (DIA) (NOM)	0.406 in(10.3 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	12320
Description	880/BP
ANSI Code	880
Standard Package	Master
Standard Package GTIN	50043168123209
Standard Package Quantity	48
Sales Unit	Blister
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	48
UPC	043168960366