



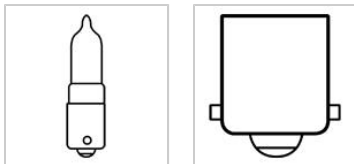

GE
Lighting

20469 - 795

GE T4 - Low Voltage

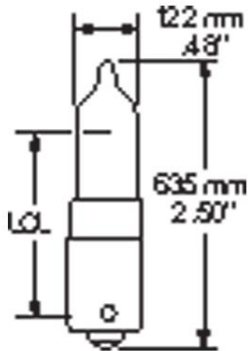

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Dispose of lamp in a closed container.
 - Do not exceed rated voltage.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Keep children away.
 - Use eye protection when handling lamp.
 - Use in enclosed fixture rated for this product.
 - Use protective screen when handling.

NOTES

- At 14 volts.

GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T4
Base	Single Contact Bayonet (BA15s)
Filament	C-6
Rated Life (NOM)	200.0 h
Atmosphere	Gas-filled
Primary Application	Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1357.0
Nominal Initial Lumens per Watt (NOM)	27.14
Mean Spherical Candlepower (MSCP) (NOM)	108.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	12.8

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.5 cm
Bulb Diameter (DIA) (NOM)	0.5 cm
Light Center Length (LCL) (NOM)	1.25 cm

PRODUCT INFORMATION

Product Code	20469
Description	795
ANSI Code	795
Standard Package	Case
Standard Package GTIN	00043168204699
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168963374