



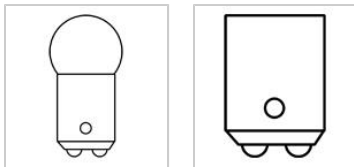

GE
Lighting

25692 - 68

GE G6 - Automotive; Marine; Low Voltage

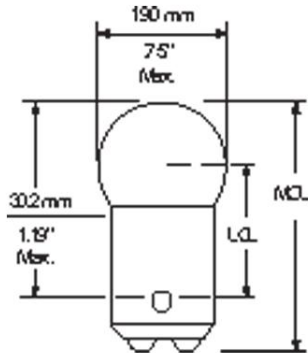

GENERAL CHARACTERISTICS

Lamp Type	Miniature - G Shape
Bulb	G6
Base	Double Contact Bayonet (BA15d)
Filament	C-2R
Rated Life (NOM)	5000.0 h
Atmosphere	Gas-filled
Primary Application	Marine;Instrument, General;Radio dial;Sidemarker, Front;Step/Courtesy;Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	50.0
Nominal Initial Lumens per Watt (NOM)	6.25
Mean Spherical Candlepower (MSCP) (NOM)	4.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	8.0
Voltage (NOM)	13.5

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.440 in(36.6 mm)
Bulb Diameter (DIA) (NOM)	0.750 in(19.0 mm)
Light Center Length (LCL) (NOM)	0.810 in(20.6 mm)

PRODUCT INFORMATION

Product Code	25692
Description	68
ANSI Code	68
Standard Package	Case
Standard Package GTIN	00043168256926
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168963299