



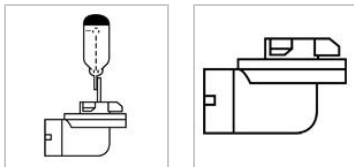

GE  
Lighting

## 25703 - 888 BULK

GE T3.25 (T3 1/4) - Low Voltage

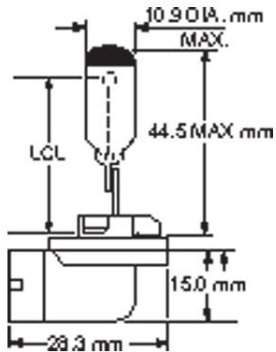

### CAUTIONS & WARNINGS

#### Caution

- Risk of Burn
  - Allow lamp/fixture to cool before handling.

#### Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Dispose of lamp in a closed container.
  - Do not exceed rated voltage.
  - Do not turn on lamp until fully installed.
  - Do not use lamp if outer glass is scratched or broken.
  - Keep children away.
  - Use eye protection when handling lamp.
  - Use in enclosed fixture rated for this product.
  - Use protective screen when handling.

### NOTES

- At 14 volts.

### GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3.25 (T3 1/4)
Base	Right Angle Prefocus (PGJ13)
Filament	C-6
Rated Life (NOM)	400.0 h
Bulb Material	Hard glass
Atmosphere	Gas-filled
Primary Application	Low Voltage

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1194.0
Nominal Initial Lumens per Watt (NOM)	23.88
Mean Spherical Candlepower (MSCP) (NOM)	95.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	12.8

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.680 in(68.1 mm)
Bulb Diameter (DIA) (NOM)	0.406 in(10.3 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

### PRODUCT INFORMATION

Product Code	25703
Description	888 BULK
ANSI Code	888
Standard Package	Case
Standard Package GTIN	10043168257036
Standard Package Quantity	540
Sales Unit	Bulk
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	540
UPC	043168257039