





GE
Lighting

26698 - 2059X UNIT

GE T2.5 (T2 1/2) - Aircraft; Low Voltage

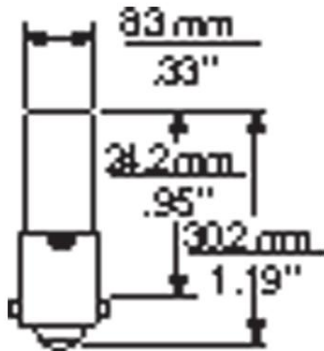

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.

Warning

- Lamp emits UV radiation which may cause eye/skin irritation.
 - Avoid exposure of eyes and skin to unshielded lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Dispose of lamp in a closed container.
 - Do not exceed rated voltage.
 - Do not touch glass with bare hands.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Keep children away.
 - Use eye protection when handling lamp.
 - Use protective screen when handling.

GENERAL CHARACTERISTICS

| | |
|---------------------|--------------------------|
| Lamp Type | Miniature - T & TL Shape |
| Bulb | T2.5 (T2 1/2) |
| Base | Miniature Bayonet (Ba9s) |
| Filament | C-8 |
| Rated Life (NOM) | 4000.0 h |
| Atmosphere | Gas-filled |
| Primary Application | Aircraft; Low Voltage |

PHOTOMETRIC CHARACTERISTICS

| | |
|---|-----|
| Mean Spherical Candlepower (MSCP) (NOM) | 8.0 |
|---|-----|

ELECTRICAL CHARACTERISTICS

| | |
|---------------|------|
| Wattage (NOM) | 10.0 |
| Voltage (NOM) | 12.0 |

DIMENSIONS

| | |
|------------------------------------|-------------------|
| Maximum Overall Length (MOL) (NOM) | 1.300 in(33.0 mm) |
| Bulb Diameter (DIA) (NOM) | 0.312 in(7.9 mm) |
| Light Center Length (LCL) (NOM) | 0.590 in(15.0 mm) |

PRODUCT INFORMATION

| | |
|----------------------------------|----------------|
| Product Code | 26698 |
| Description | 2059X UNIT |
| ANSI Code | 2059X |
| Standard Package | Case |
| Standard Package GTIN | 10043168266984 |
| Standard Package Quantity | 10 |
| Sales Unit | Unit |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 10 |
| UPC | 043168266987 |