






GE  
Lighting

## 29001 - TEL/24E2

GE T2 - Low Voltage; Telephone

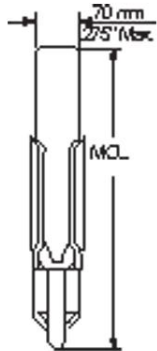

### GENERAL CHARACTERISTICS

|                     |                          |
|---------------------|--------------------------|
| Lamp Type           | Miniature - T & TL Shape |
| Bulb                | T2                       |
| Base                | Tel. Slide No. 3         |
| Filament            | C-2F                     |
| Rated Life (NOM)    | 7000.0 h                 |
| Atmosphere          | Vacuum                   |
| Primary Application | Low Voltage;Telephone    |

### ELECTRICAL CHARACTERISTICS

|               |      |
|---------------|------|
| Wattage (NOM) | 1.0  |
| Voltage (NOM) | 24.0 |

### DIMENSIONS

|                                    |                   |
|------------------------------------|-------------------|
| Maximum Overall Length (MOL) (NOM) | 1.690 in(42.9 mm) |
| Bulb Diameter (DIA) (NOM)          | 0.250 in(6.4 mm)  |

### PRODUCT INFORMATION

|                                  |                |
|----------------------------------|----------------|
| Product Code                     | 29001          |
| Description                      | TEL/24E2       |
| Standard Package                 | Case           |
| Standard Package GTIN            | 20043168290016 |
| Standard Package Quantity        | 50             |
| Sales Unit                       | Unit           |
| No Of Items Per Sales Unit       | 1              |
| No Of Items Per Standard Package | 50             |
| UPC                              | 043168290012   |