




GE  
Lighting

## 23718 - Q250PAR/FL30

GE Quartzline® PAR38 - Medium Flood

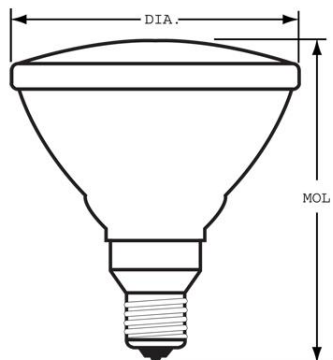

### CAUTIONS & WARNINGS

#### Caution

- Risk of Burn
  - Allow lamp to cool before handling.
- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

#### Warning

- Electric Shock
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in enclosed fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Do not use lamp if outer glass is scratched or broken.
  - Do not exceed 110% of rated voltage.
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.

### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR38
Base	Medium Skirt (E26/50x39)
Filament	CC-8
Rated Life (NOM)	4200.0 h
Primary Application	Medium Flood

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	3600.0
Beam Spread (NOM)	30.0 °
Center Beam Candlepower (CBCP) (NOM)	9000.0
Color Temperature (NOM)	2880.0 K
Nominal Initial Lumens per Watt (NOM)	14.4

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	250.0
Voltage (NOM)	120.0

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.310 in(134.9 mm)
Bulb Diameter (DIA) (NOM)	4.750 in(120.6 mm)

### PRODUCT INFORMATION

Product Code	23718
Description	Q250PAR/FL30
Standard Package	Case
Standard Package GTIN	00043168237185
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168979610