



Reflector PAR38 Krypton

Reflector 250W Med Skt 120-130V PAR38 FL 1CT

Philips Family of Specialty Incandescents provide the perfect light for dramatic accents and display lighting as well as general lighting in a variety of applications. These PAR Krypton flood lamps are available with medium skirted bases.

Product data

• General Characteristics

Base	Medium Skirted [Skirted Medium Screw (PAR Lamps)]
Bulb	PAR38 [PAR 4.75 inch/121mm]
Operating Position	Universal [Any or Universal (U)]
Atmosphere	Krypton
Nominal Lifetime	4000 hr
Rated Lifetime (hours)	4000 hr

• Light Technical Characteristics

Beam Description	Flood [Flood]
Beam Angle Technical	30 D
Approx. MBCP	5000 (max) cd
Color Rendering Index	100 Ra8
Initial lumen	3100 Lm

• Electrical Characteristics

Watts	250 W
Voltage	120-130 V
Dimmable	Yes

• Measuring Conditions

Measuring Voltage	125 V
Life test position	180 deg (cap up vertical)
Switching cycle	2 times a 24h; minimum 15 minutes off

Ageing
LV Reference

1 hour at rated voltage
See also LV 080-031-010

• Product Dimensions


Overall Length C	135 (max) mm
Overall Length Rim C1	121 mm
Diameter D	122.5 (max) mm
Eccentricity	1.0 (max) mm
Skewness	2.5 (max) mm
Glass Strain Big Parabola	500 nm
Glass Strain Small Parabola	650 nm
L-size	70 mm

• Product Data

Product number	374322
Full product name	Reflector 250W Med Skt 120-130V PAR38 FL 1CT
Short product name	K250PAR38/FL 120-130V 12PK
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12
Bar code on pack	46677374327
Bar code on case	50046677374322
Logistics code(s)	923834636104
tpd_ilcos_cd	IPAR-250-120/130-E26-121/30
eop_net_weight_pp	307.000 gr

PHILIPS

Dimensional drawing

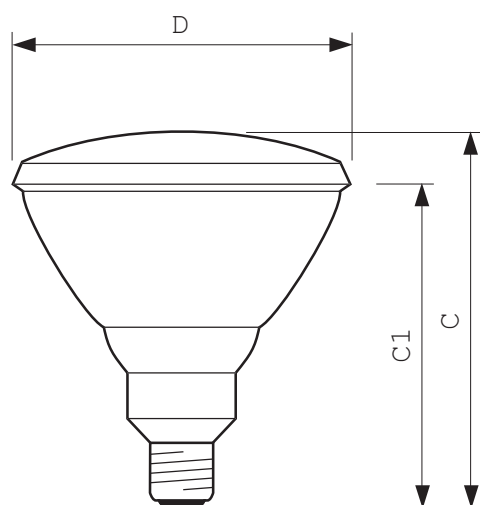

Reflector 250W Med Skt 120-130V PAR38 FL 1CT

Product	C (Max)	C1 (Norm)	D (Max)
PAR38 250W E26/50x39 120-130V FL Kr	135	121	122.5



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 15
data subject to change