



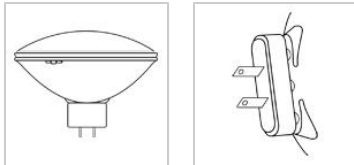

GE
Lighting

43495 - Q500PAR56MFL

GE Quartzline® PAR56 - Medium Flood

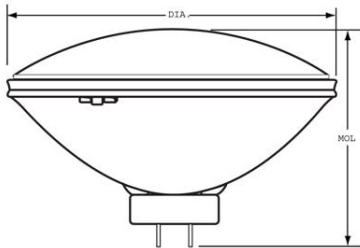

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Mogul End Prong (GX16d)
Filament	CC-6
Rated Life (NOM)	4000.0 h
Primary Application	Medium Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	8000.0
Beam Spread - Horizontal	42.0 - 10.0 °/26.0 - 50.0 °
Beam Spread - Vertical	10.0 - 50.0 °/20.0 - 10.0 °
Center Beam Candlepower (CBCP) (NOM)	43000.0
Color Temperature (NOM)	2950.0 K
Max. Beam Candlepower (MBCP) (MAX)	43000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	500.0
Voltage (NOM)	120.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.000 in(127.0 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	43495
Description	Q500PAR56MFL
Standard Package	Case
Standard Package GTIN	10043168434956
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168434959