





GE
Lighting

43496 - Q500PAR56WFL

GE Quartzline® PAR56 - Wide Flood

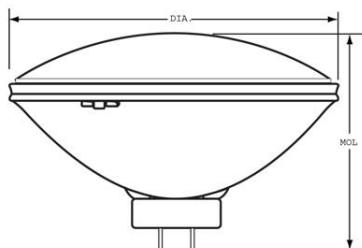

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Mogul End Prong (GX16d)
Filament	CC-6
Rated Life (NOM)	4000.0 h
Primary Application	Wide Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	8000.0
Beam Spread - Horizontal	66.0 - 10.0 °/44.0 - 50.0 °
Beam Spread - Vertical	20.0 - 50.0 °/38.0 - 10.0 °
Center Beam Candlepower (CBCP) (NOM)	19000.0
Color Temperature (NOM)	2950.0 K
Max. Beam Candlepower (MBCP) (MAX)	17000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	500.0
Voltage (NOM)	120.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.000 in(127.0 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	43496
Description	Q500PAR56WFL
Standard Package	Case
Standard Package GTIN	10043168434963
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168434966