



Double Ended Linear

Double Ended Linear 500W 120V T3 Q 1CT

High-quality white light with superior lumen performanceHalogen Double Ended lamps provide bright,white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs.High lumen output provides light where you need it.

Product data

• General Characteristics

Base	R7s
Bulb	T3 [T 12mm]
Bulb Finish	Clear
Operating Position	Universal [Any or Universal (U)]
RatedAvgLife(See Family Notes)	2000 hr
Nominal Lifetime	2000 hr
Rated Lifetime (hours)	2000 hr
Rated Lifetime (years)	2 an

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	2900 K
Color Temperature technical	2900 K
Initial lumen	9500 Lm
Luminous Efficacy Lamp	19.0 Lm/W

• Electrical Characteristics

Watts	500 W
Lamp Wattage Technical	500 W
Voltage	120 V
Lamp Current	4.17 A
Dimmable	Yes

Starting Time	0.0 s
---------------	-------

• Environmental Characteristics

Energy Efficiency Label (EEL)	D
-------------------------------	---

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions

Insertion Length B	112.6 (min), 114.2 (nom), 115.8 (max) mm
Overall Length C	117.6 (max) mm
Diameter D	12 (max) mm



• Product Data

Product number	200105
Full product name	PLUSLine Pro Small 500W R7s 120V 1CT
Short product name	PLUS PRO S 500W R7s 120V 1CT/12
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12
Bar code on pack	46677100100
Bar code on case	50046677100105
Logistics code(s)	924735334593
eop_net_weight_pp	0.010 kg

PHILIPS

Double Ended Linear

Dimensional drawing

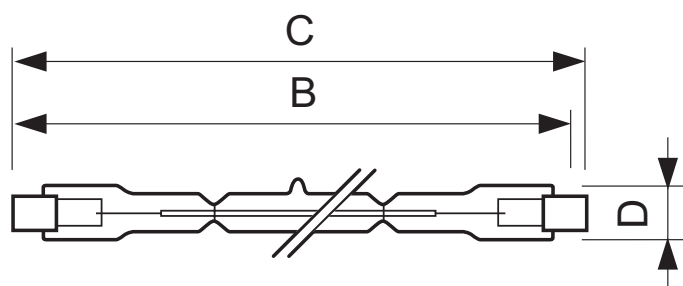

R7s

Double Ended Linear 500W 120V T3 Q 1CT

Product	B (Min)	B (Norm)	B (Max)	C (Max)	D (Max)
DESmall 500W R7s 120V	112.6	114.2	115.8	117.6	12



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, May 21
data subject to change