



GE
Lighting

40566 - EBV 24PK

GE PS25 - Photofloods

This product is no longer manufactured. Remaining stock will be sold.


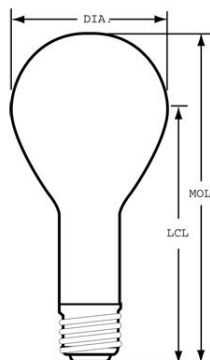


Photo
Not Available

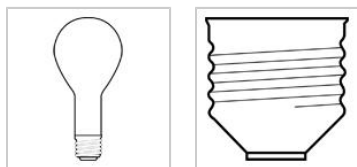

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
 - Turn power off before installing lamp.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water, liquid or metal contact.
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - A-line
Bulb	PS25
Base	Medium Screw (E26)
Filament	C-9
Bulb Finish	Frost
Rated Life (MIN)	6.0 h
Primary Application	Photofloods

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	17000.0
Color Temperature (NOM)	3400.0 K
Nominal Initial Lumens per Watt (NOM)	34.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	500.0
Voltage (NOM)	118.0
Burn Position	Universal burning position

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	6.938 in(176.2 mm)
Bulb Diameter (DIA) (NOM)	3.125 in(79.4 mm)
Light Center Length (LCL) (NOM)	5.250 in(133.4 mm)

PRODUCT INFORMATION

Product Code	40566
Description	EBV 24PK
ANSI Code	EBV
Standard Package	Case
Standard Package GTIN	10043168405666
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168405669