






GE  
Lighting

## 30151 - DXB

### GE R40 - Photofloods

- High color rendering (65-70CRI), much better than standard HPS

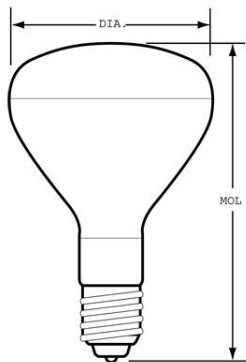

### GENERAL CHARACTERISTICS

Lamp Type	Incandescent - Reflector
Bulb	R40
Base	Medium Screw (E26)
Filament	CC-2V
Rated Life (MIN)	6.0 h
Rated Life (NOM)	6.0 h
Primary Application	Photofloods

### PHOTOMETRIC CHARACTERISTICS

Center Beam Candlepower (CBCP) (NOM)	45000.0
Color Temperature (NOM)	3300.0 K

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	500.0
Voltage (NOM)	120.0

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	6.630 in(168.4 mm)
Bulb Diameter (DIA) (NOM)	5.000 in(127.0 mm)

### PRODUCT INFORMATION

Product Code	30151
Description	DXB
ANSI Code	DXB
Standard Package	Case
Standard Package GTIN	10043168301517
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168301510

### CAUTIONS & WARNINGS

#### Caution

- Risk of Burn
  - Allow lamp/fixture to cool before handling.
  - Turn power off before installing lamp.
- Lamp may shatter and cause injury if broken
  - Dispose of lamp in a closed container.
  - Do not use lamp if outer glass is scratched or broken.

#### Warning

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in enclosed fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Avoid direct water, liquid or metal contact.
  - Do not exceed 110% of rated voltage.
  - Do not use lamp if outer glass is scratched or broken.
  - Use in enclosed fixture rated for this product.