



Double Ended Linear

Double Ended Linear 1500W R7s 240V T3 CL 1CT

High-quality white light with superior lumen performanceHalogen
Double Ended lamps provide bright,white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs.High lumen output provides light where you need it.

Product data

• General Characteristics

Base	R7s
Bulb	T3 [Diameter: .433 inch /11mm]
Bulb Finish	Clear
Operating Position	Horizontal +/- 4 D [Parallel +/-4D or Horizontal(HOR)]
RatedAvgLife(See Family Notes)	2000 hr
Nominal Lifetime	2000 hr
Rated Lifetime (hours)	2000 hr
Rated Lifetime (years)	2 an

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	2900 K
Color Temperature technical	2900 K
Initial lumen	33000 Lm
Rated Luminous Flux	33000 Lm
Luminous Efficacy	22 Lm/W
Lamp LLMF - end nominal lifetime	80 (min) %

• Electrical Characteristics

Rated Wattage	1500.0 W
Watts	1500 W
Lamp Wattage Technical	1500.0 W
Power Factor	1 -
Voltage	240 V
Lamp Current	6.25 A

Dimmable	Yes
Starting Time	0.0 s
Warm-up Time to 60% Light Outp	instant full light

• Environmental Characteristics

Energy Efficiency Label (EEL)	C
Energy consumption kWh/1000h	1500 kWh

• Measuring Conditions

Switching cycle	8000X
-----------------	-------

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions

Insertion Length B	249.1 (min), 250.7 (nom), 252.3 (max) mm
Overall Length C	254.1 (max) mm
Diameter D	11 (max) mm

• Product Data

Product number	132266
Full product name	Double Ended Linear 1500W R7s 240V T3 CL 1CT
Short product name	1500T3Q/P/CL 240V 12PK
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12


PHILIPS

Double Ended Linear

Bar code on pack 46677132262
Bar code on case 50046677132267
Logistics code(s) 923932245793


tpd_ilcos_cd HDG//RS-1500-240-R7s-250,7
eop_net_weight_pp 0.020 kg

Dimensional drawing

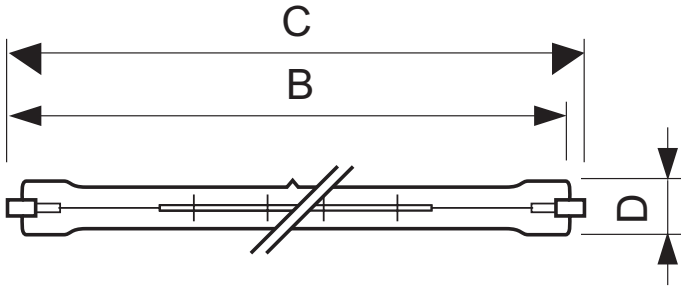

Double Ended Linear 1500W R7s 240V T3 CL 1CT

Product	B (Min)	B (Norm)	B (Max)	C (Max)	D (Norm)	D (Max)
DEBig 1500W R7s 240V T11 CL	249.1	250.7	252.3	254.1	-	11



R7s



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 16
data subject to change