



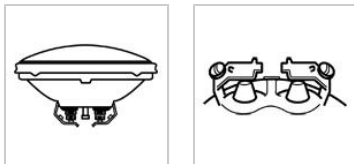

GE  
Lighting

**24690 - 4519**

GE PAR36 - Marine

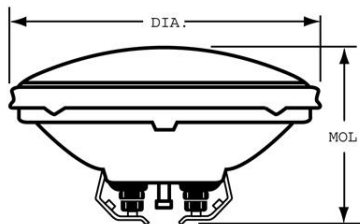

#### CAUTIONS & WARNINGS

##### Caution

- Risk of Burn
  - Allow lamp to cool before handling.
- Lamp may shatter and cause injury if broken
  - Dispose of lamp in a closed container.
  - Do not use lamp if outer glass is scratched or broken.

##### Warning

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Do not exceed rated voltage.
  - Do not use lamp if outer glass is scratched or broken, even if bulb continues to light. Turn power off, remove and dispose.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in fixture rated for this product.
  - Use in fixture rated for this product--see instructions.

#### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	25.0 h
Primary Application	Marine

#### PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	40.0 - 10.0 °
Beam Spread - Vertical	7.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	30000.0

#### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	100.0
Voltage (NOM)	13.0

#### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

#### PRODUCT INFORMATION

Product Code	24690
Description	4519
ANSI Code	4519
Standard Package	Case
Standard Package GTIN	00043168246903
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168962339