





GE
Lighting

41503 - 4509X

GE PAR36 - Marine; Very Narrow Spot

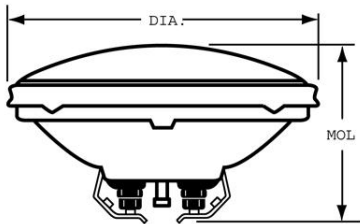

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	25.0 h
Primary Application	Marine; Very Narrow Spot

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	12.0 - 10.0 °
Beam Spread - Vertical	6.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	110000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	100.0
Voltage (NOM)	13.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	41503
Description	4509X
ANSI Code	4509X
Standard Package	Case
Standard Package GTIN	10043168415030
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168415033