



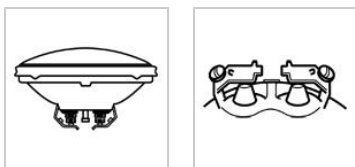

GE
Lighting

43570 - H7553

GE PAR36 - Emergency Building Light; Emergency Building

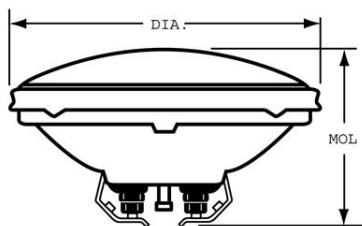

CAUTIONS & WARNINGS

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	50.0 h
Primary Application	Emergency Building

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	30.0 - 10.0 °
Beam Spread - Vertical	20.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	850.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	12.0
Voltage (NOM)	6.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	43570
Description	H7553
ANSI Code	H7553
Standard Package	Case
Standard Package GTIN	10043168435700
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	043168435703