



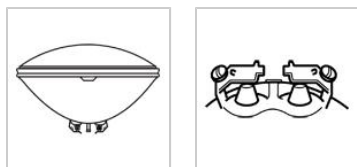

GE  
Lighting

## 49695 - H7612

GE PAR46 - Truck

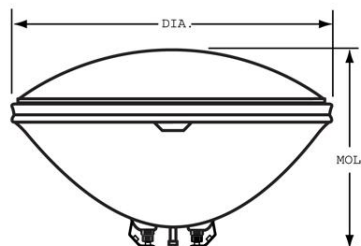

### CAUTIONS & WARNINGS

#### Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Dispose of lamp in a closed container.
  - Do not use lamp if outer glass is scratched or broken.

### GENERAL CHARACTERISTICS

|                     |                   |
|---------------------|-------------------|
| Lamp Type           | Sealed Beam - PAR |
| Bulb                | PAR46             |
| Base                | Screw Terminals   |
| Filament            | C-6               |
| Rated Life (NOM)    | 450.0 h           |
| Primary Application | Truck             |

### PHOTOMETRIC CHARACTERISTICS

|                                    |               |
|------------------------------------|---------------|
| Beam Spread - Horizontal           | 40.0 - 10.0 ° |
| Beam Spread - Vertical             | 7.0 - 10.0 °  |
| Max. Beam Candlepower (MBCP) (MAX) | 15000.0       |

### ELECTRICAL CHARACTERISTICS

|               |      |
|---------------|------|
| Wattage (NOM) | 38.0 |
| Voltage (NOM) | 12.8 |

### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 3.750 in(95.2 mm)  |
| Bulb Diameter (DIA) (NOM)          | 5.750 in(146.0 mm) |

### PRODUCT INFORMATION

|                            |                |
|----------------------------|----------------|
| Product Code               | 49695          |
| Description                | H7612          |
| ANSI Code                  | H7612          |
| Standard Package           | Case           |
| Standard Package GTIN      | 10043168496954 |
| Standard Package Quantity  | 12             |
| Sales Unit                 | Unit           |
| No Of Items Per Sales Unit | 1              |
| No Of Items Per Standard   | 12             |
| Package                    |                |
| UPC                        | 043168496957   |