





GE  
Lighting

**40576 - 4552**

GE PAR64 - Aircraft; Very Narrow Spot

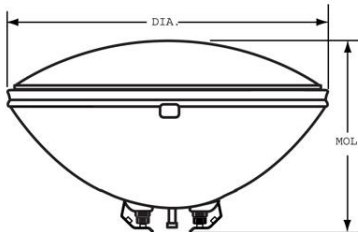

#### GENERAL CHARACTERISTICS

|                     |                            |
|---------------------|----------------------------|
| Lamp Type           | Sealed Beam - PAR          |
| Bulb                | PAR64                      |
| Base                | Screw Terminals            |
| Filament            | CC-8                       |
| Rated Life (NOM)    | 25.0 h                     |
| Primary Application | Aircraft; Very Narrow Spot |

#### PHOTOMETRIC CHARACTERISTICS

|                                    |              |
|------------------------------------|--------------|
| Beam Spread - Horizontal           | 7.0 - 10.0 ° |
| Beam Spread - Vertical             | 8.0 - 10.0 ° |
| Max. Beam Candlepower (MBCP) (MAX) | 500000.0     |

#### ELECTRICAL CHARACTERISTICS

|               |       |
|---------------|-------|
| Wattage (NOM) | 250.0 |
| Voltage (NOM) | 28.0  |

#### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 3.750 in(95.2 mm)  |
| Bulb Diameter (DIA) (NOM)          | 8.000 in(203.2 mm) |

#### PRODUCT INFORMATION

|                            |                |
|----------------------------|----------------|
| Product Code               | 40576          |
| Description                | 4552           |
| ANSI Code                  | 4552           |
| Standard Package           | Case           |
| Standard Package GTIN      | 10043168405765 |
| Standard Package Quantity  | 12             |
| Sales Unit                 | Unit           |
| No Of Items Per Sales Unit | 1              |
| No Of Items Per Standard   | 12             |
| Package                    |                |
| UPC                        | 043168405768   |