

The Philips Family of Silicone Coated Rough Service bulbs are the perfect choice in areas where there is concern if a bulb drops or shatters. Since Silicone Coated Rough Service bulbs resist breakage or shattering, they are perfect for food serving areas, as well as, standard, industrial rough surface, appliance and sign use.

Product data

• General Characteristics

Base	Medium [Single Contact Medium Screw]
Base Information	Aluminum [Aluminum Base]
Bulb	A21
Bulb Finish	Frost Silicone
Filament Shape	RC-9 [Reinforced Construction C-9]
Operating Position	Universal [Any or Universal (U)]
Main Application	Rough Service
Atmosphere	Gas
Nominal Lifetime	1000 hr
Rated Lifetime (hours)	1000 hr

• Light Technical Characteristics

Initial lumen	2205 Lm
Rated Luminous Flux	2205 Lm

• Electrical Characteristics

Watts	150 W
Voltage	120-130 V
Starting Time	0.0 s

• Product Dimensions

Max Overall Length (MOL) - C	5.313 (max) in
Diameter D	2.625 in

• Footnotes


Footnotes Incandescent	66 [Silicone Coating reduces lumen output from Standard Values less than 3%. (66)]
------------------------	--

• Product Data

Product number	149690
Full product name	Sil Ctd 150W Med 120-130V A21 2WR
Short product name	Sil Ctd 150W Med 120-130V A21 2WR
Pieces per Sku	1
eop_pck_cfg	60
Skus/Case	60
Bar code on pack	46677279837
Bar code on case	50046677149692
Logistics code(s)	925240634305
eop_net_weight_pp	0.001 kg



## Dimensional drawing

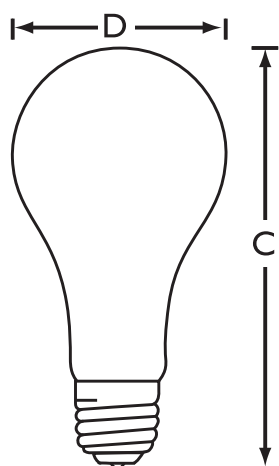

A21



E26

### Sil Ctd 150W Med 120-130V A21 2WR

Product	C (Max)	D (Norm)	D (Max)
RC 150W E26 120-130V A-21 RC-9 FR-Sil	-	-	-



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, February 15  
data subject to change