





GE
Lighting

47723 - 65R30FL/STGPQ1/6

GE saf-t-gard® 65 watt R30 1-pack

- Use original GE's Soft White when you need a light without glare and harsh shadows.
- Replace ordinary light bulbs with GE Flood and Spotlight in all your track and recessed lighting fixtures.
- 120 volts
- 2600K soft white light appearance
- Estimated yearly energy costs \$7.83 based on 3 hours per day \$0.11 per kWh
- GE saf-t-gard® bulbs feature a protective Teflon® coating that helps contain glass fragments if broken. Designed with heavy-duty, all-weather construction, these bulbs protect against shattering, rain breakage and splatter from oil and lubricants. GE saf-t-gard® bulbs are perfect for home use in kitchens, basements garages, workshops and enclosed exterior fixtures
- Lasts 1.8 years based on 3 hours per day usage
- R30 shape with medium base for use in rough service applications

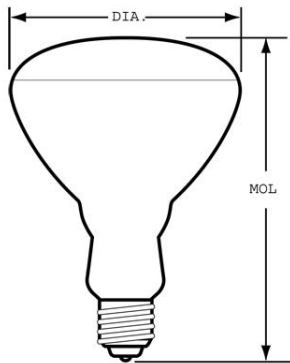

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - Reflector
Bulb	BR30
Base	Medium Screw (E26)
Filament	CC-6
Rated Life (NOM)	2000.0 h
Primary Application	Indoor Floodlight; Shatter-Resistant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	620.0
Color Temperature (NOM)	2600.0 K
Nominal Initial Lumens per Watt (NOM)	9.5

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	65.0
Voltage (NOM)	120.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.370 in(136.4 mm)
Bulb Diameter (DIA) (NOM)	3.750 in(95.2 mm)

PRODUCT INFORMATION

Product Code	47723
Description	65R30FL/STGPQ1/6
Standard Package	BUNDLE
Standard Package GTIN	30043168477230
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	30
Package	
UPC	043168477239

CAUTIONS & WARNINGS

NOTES

- Burning position - base up.
- Will operate in any burning position, but fixed-socket usage other than base up or continuous burning in any position in ambient temperatures above 150 degrees F (66 degrees C), may result in some loss of protective coating. Reflectors and accessories may raise bulb temperature and cause some loss of protective coating.