



GE  
Lighting

## 12004 - FLE15TT3/827


GE Soft White Biax® T3 - Facilities; Retail Display; Hospitality; Office; Restaurant

- Up to 75% energy savings One piece unit screws directly into incandescent sockets T3 Mini Biax(R) provides longest life with smallest overall size

- Super long life

**This product is no longer manufactured. Remaining stock will be sold.**

a product of  
**ecomagination**

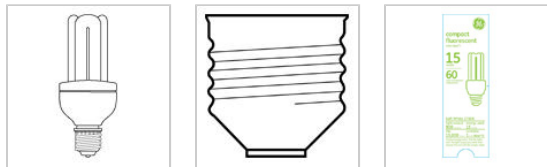

### CAUTIONS & WARNINGS

#### Caution

- Lamp may shatter and cause injury if broken
  - Remove and install by grasping only plastic portion of the lamp.

#### Warning

- Risk of Electric Shock
  - Do not open - no user serviceable parts inside.
  - Do not use where directly exposed to water.

### NOTES

- Amalgam product experience stable brightness over a wider temperature range and in various operating positions.
- Best performance if operated base up and at 77 degrees F (25C) ambient temperature.
- Fluorescent lamp lumens decline during life
- Lumens on one piece self ballasted lamp systems are measured base up.
- Most one piece self ballasted lamps for incandescent sockets and plug-in lamps with screw-in adapters do not work with clip-on shades
- Use only on 120V 60 Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.

### GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	T3
Base	Medium Screw (E26)
Equivalent Wattage (NOM)	60.0 W
Rated Life (NOM)	15000.0 h
Starting Temperature (MIN)	-15.0 °C
Total Harmonic Distortion (THD) (NOM)	145.0 %
Mercury Content (NOM)	4.0 mg
Picograms of Mercury (NOM)	370.4 pg
Primary Application	Standard;Facilities;Hospitality;Office;Retail Display

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	900.0
Mean Lumens (NOM)	720.0
Nominal Initial Lumens per Watt (NOM)	60.0
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	15.0
Voltage (NOM)	120.0
Input Voltage (NOM)	120.0 V
Input Current (NOM)	0.28 A
Power Factor (NOM)	0.6

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.900 in(124.5 mm)
Nominal Length (NOM)	4.900 in(124.5 mm)

### PRODUCT INFORMATION

Product Code	12004
Description	FLE15TT3/827
Standard Package	Case
Standard Package GTIN	10043168120040
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168120043