




GE
Lighting

17174 - F18BXSPX30RS10PK

GE Biax® T5 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse



High Color Rendering
Energy Savings




CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

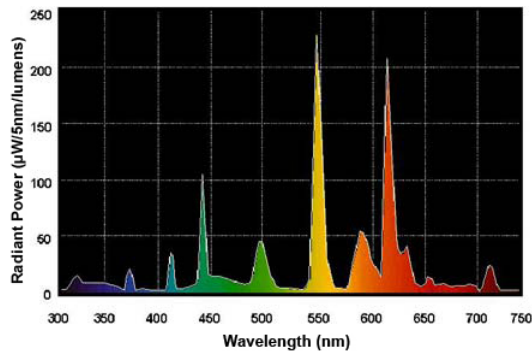

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T5
Base	4-Pin (2G11)
Equivalent Wattage (NOM)	65.0 W
Rated Life (NOM)	20000.0 h
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	4.0 mg
Picograms of Mercury (NOM)	176.9911 pg
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;Warehouse

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1250.0
Mean Lumens (NOM)	1130.0
Nominal Initial Lumens per Watt (NOM)	69.44444
Color Temperature (NOM)	3000.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	18.0
Voltage (NOM)	120.0
Lamp Current (NOM)	0.375 A

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	10.000 in(254.0 mm)
Nominal Length (NOM)	10.000 in(254.0 mm)
Bulb Diameter (DIA) (NOM)	1.125 in(28.6 mm)

PRODUCT INFORMATION

Product Code	17174
Description	F18BXSPX30RS10PK
ANSI Code	60501-IEC-2218-2
Standard Package	Master
Standard Package GTIN	10043168171745
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	40
Package	
UPC	043168171748