



GE
Lighting

25418 - EL23/R25/SW

GE energy smart® CFL 23 watt R25 floodlight 1-pack

- \$110 in energy savings over the life of the bulb based on 3 hours per day usage
- 90 watt replacement uses only 23 watts
- Estimated yearly energy costs \$2.77 based on 3 hours per day \$0.11 per kWh
- Lasts 13.7 years based on 3 hours per day usage
- R25 indoor floodlight with medium base for use in directional fixtures such as recessed can lighting
- The GE energy smart® indoor floodlight CFLs feature a GE Spiral® bulb on the inside that uses 75% less energy and lasts up to 5 times longer than incandescent indoor reflectors. These bulbs' funnel shape help direct light where it is needed better than a standard CFL or incandescent bulb. Use GE energy smart® indoor floodlight CFLs in indoor recessed track and recessed fixtures to create broad beams of light in any room or space



GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	R25
Base	Medium Screw (E26)
Bulb Finish	Soft white
Equivalent Wattage (NOM)	65.0 W
Rated Life (NOM)	15000.0 h
Starting Temperature (MIN)	0.0 °C
Total Harmonic Distortion (THD) (NOM)	130.0 %
Mercury Content (NOM)	3.0 mg
Picograms of Mercury (NOM)	227.3 pg
Primary Application	Indoor Floodlight;Facilities;Retail Display;Hospitality;Office;Restaurant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1100.0
Mean Lumens (NOM)	880.0
Nominal Initial Lumens per Watt (NOM)	47.82609
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	23.0
Input Voltage (NOM)	120.0 V
Input Current (NOM)	0.37 A
Power Factor (NOM)	0.6

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.900 in(124.5 mm)
Nominal Length (NOM)	4.900 in(124.5 mm)
Bulb Diameter (DIA) (NOM)	3.125 in(79.4 mm)

PRODUCT INFORMATION

Product Code	25418
Description	EL23/R25/SW
Standard Package	Case
Standard Package GTIN	10043168254189
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168254182

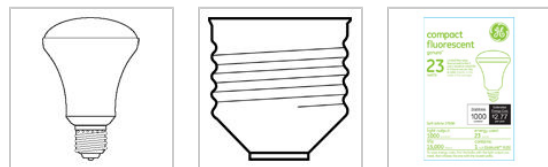

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

Warning

- Risk of Electric Shock
 - Do not open - no user serviceable parts inside.
 - Do not use where directly exposed to water.

NOTES

- Best performance if operated base up and at 77 degrees F (25C) ambient temperature.
- Fluorescent lamp lumens decline during life
- Lumens on one piece self ballasted lamp systems are measured base up.
- Use only on 120V 60 Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.