



GE
Lighting

14419 - F20T12/SUN/ECO


GE closet & laundry 20 watt T12 1-pack

- Ideal for color critical areas or where sunlight is at a minimum.
- Full spectrum light
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 24 inches long
- 5000K sunshine light appearance
- Lasts 4.1 years based on 6 hours per day usage
- For use in task areas, closets and laundry rooms
- GE closet & laundry fluorescent bulbs provide very cool white light so you can get organized – whatever the task at hand. These bulbs are best for household laundry rooms and task areas and commercial workshops, clean rooms and light industrial areas
- Very cool light for task areas



High Color Rendering

Photo
Not Available

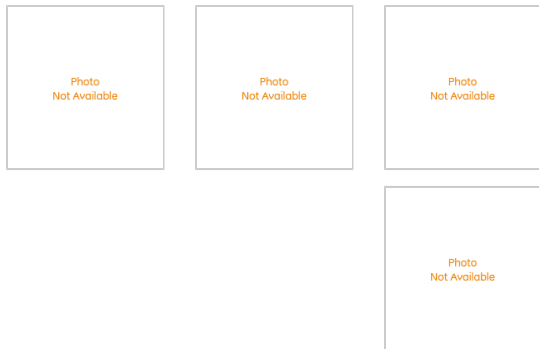

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- *Four year life based on rated life at 6 hours/day.

GRAPHS & CHARTS

Graphs_Lamp Mortality

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	9000.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	4.95 mg
Picograms of Mercury (NOM)	696.2 pg
Primary Application	Closet & Laundry

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	875.0
Mean Lumens (NOM)	790.0
Nominal Initial Lumens per Watt (NOM)	43.75
Color Temperature (NOM)	5000.0 K
Color Rendering Index (CRI) (NOM)	90.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	20.0
Open Circuit Voltage (rapid start) (MAX)	220.0 V
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	157 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	24.000 in(609.6 mm)
Minimum Overall Length (NOM)	23.670 in(601.2 mm)
Nominal Length (NOM)	24.000 in(609.6 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)
Max Base Face to Base Face (A) (NOM)	23.220 in(589.8 mm)
Face to End of Opposing Pin (B) (MIN)	23.400 in(594.4 mm)
Face to End of Opposing Pin (B) (MAX)	23.500 in(596.9 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	23.670 in(601.2 mm)

PRODUCT INFORMATION

Product Code	14419
Description	F20T12/SUN/ECO
ANSI Code	2015-1
Standard Package	BUNDLE
Standard Package GTIN	30043168144194
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168144193

Photo
Not Available