




GE
Lighting

22920 - F15T8/AR/SA 6PK

GE T8 - Saltwater Aquarium

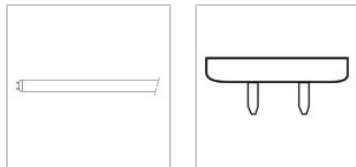

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Do not use excessive force when installing lamp.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Risk of Electric Shock
 - Avoid direct water/liquid contact.
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

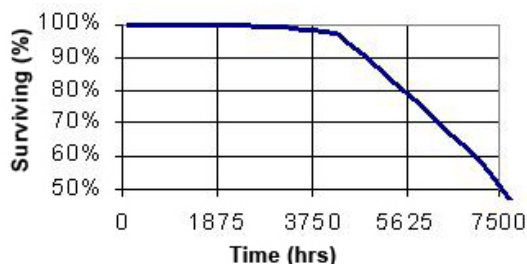

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	7500.0 h
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	18.0 mg
Picograms of Mercury (NOM)	11428.6 pg
Primary Application	Saltwater Aquarium47

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	210.0
Nominal Initial Lumens per Watt (NOM)	14.0
Color Temperature (NOM)	10000.0 K
Color Rendering Index (CRI) (NOM)	62.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	15.0
Open Circuit Voltage (rapid start) (MAX)	220.0 V
Open Circuit Voltage (rapid start) Min @ Temperature	157 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	48.000 in(1219.2 mm)
Nominal Length (NOM)	48.000 in(1219.2 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)

PRODUCT INFORMATION

Product Code	22920
Description	F15T8/AR/SA 6PK
Standard Package	BUNDLE
Standard Package GTIN	30043168229204
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168229203