





GE  
Lighting

## 10282 - F25T12CW/28 6PK

GE garage & basement 25 watt T12 1-pack

- Lasts 3.4 years based on 6 hours per day usage
- 1.5 inch diameter T12 with medium bi-pin (g13) base
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- 28 inches long



### CAUTIONS & WARNINGS

#### Caution


- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use excessive force when installing lamp.

#### Warning

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.

### GRAPHS & CHARTS

#### Graphs\_Lamp Mortality

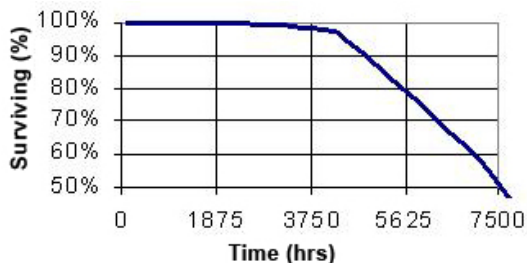

### GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	7500.0 h
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	60.0 mg
Picograms of Mercury (NOM)	5755.4 pg
Primary Application	Appliance;Speciality

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1550.0
Mean Lumens (NOM)	1390.0
Nominal Initial Lumens per Watt (NOM)	62.0
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	25.0
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Current Crest Factor (MAX)	1.7

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	27.780 in(705.6 mm)
Minimum Overall Length (NOM)	27.670 in(702.8 mm)
Nominal Length (NOM)	28.000 in(711.2 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)
Max Base Face to Base Face (A) (NOM)	27.220 in(691.4 mm)
Face to End of Opposing Pin (B) (MIN)	27.400 in(696.0 mm)
Face to End of Opposing Pin (B) (MAX)	27.500 in(698.5 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	27.670 in(702.8 mm)

### PRODUCT INFORMATION

Product Code	10282
Description	F25T12CW/28 6PK
ANSI Code	2016-1
Standard Package	BUNDLE
Standard Package GTIN	00043168102827
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168981248