




GE
Lighting

10702 - F26T8/CW/4

GE T8 - Appliance

- Passes TCLP, which can lower disposal costs.

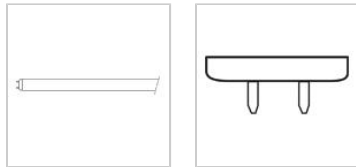

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

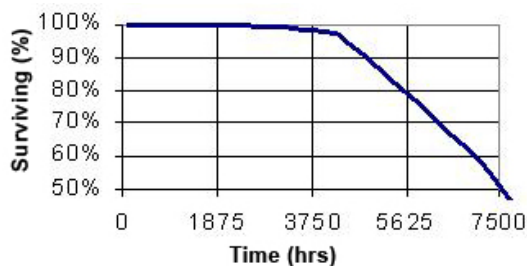

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	Medium Bi-Pin (G13)
Rated Life (instant start) @ Time	7500.0 h
Bulb Material	7500 h @ 3 h
Mercury Content (NOM)	Soda lime
Picograms of Mercury (NOM)	18.0 mg
Additional Info	2212.0 pg
Primary Application	TCLP compliant
	Appliance;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1275.0
Mean Lumens (NOM)	1085.0
Nominal Initial Lumens per Watt (NOM)	67.10526
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	19.0
Cathode Resistance Ratio - Rh/ Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	26.000 in(660.4 mm)
Nominal Length (NOM)	26.000 in(660.4 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Face to End of Opposing Pin (B) (MAX)	25.500 in(647.7 mm)

PRODUCT INFORMATION

Product Code	10702
Description	F26T8/CW/4
Standard Package	Case
Standard Package GTIN	10043168107027
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168107020