



GE
Lighting

15984 - F25T8SP41ECOCVG

GE Ecolux® covRguard® Starcoat® T8 - Shatter-Resistant

• A shatter resistant lamp encased in a 15 ml Lexan sleeve. Complies with FDA food code 6-202 and 21CFR 110.20. NSF and UL certified. Blocks UV lamp emissions from 380 to 180 nm.

• Passes TCLP, which can lower disposal costs.



High Color Rendering

Photo
Not Available




CAUTIONS & WARNINGS

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

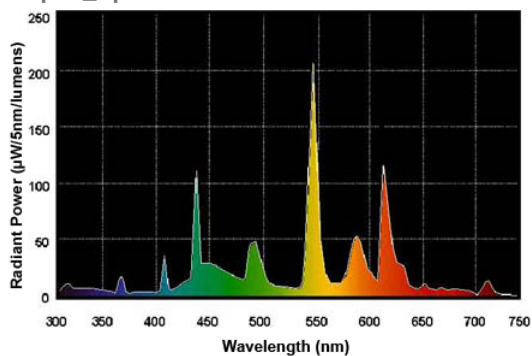

Graphs_Lumen Maintenance

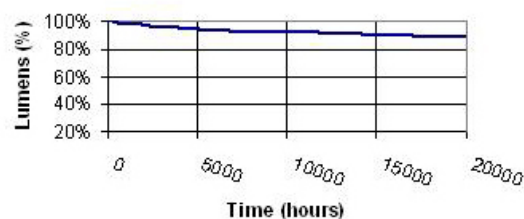

Graphs_Lamp Mortality

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	30000.0 h
Rated Life (instant start) @ Time	15000 h @ 3 h
Rated Life (rapid start) @ Time	20000 h @ 12 h
Rated Life (rapid start) @ Time	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	2.95 mg
Picograms of Mercury (NOM)	76.82291 pg
Additional Info	TCLP compliant
Primary Application	Shatter-Resistant;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2020.0
Mean Lumens (NOM)	1920.0
Nominal Initial Lumens per Watt (NOM)	80.8
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	78.0
S/P Ratio (Scotopic/Photopic Ratio) (NOM)	1.6

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	25.0
Open Circuit Voltage (rapid start) (MAX)	355.0 V
Open Circuit Voltage (rapid start) Min @ Temperature	260 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	36.000 in(914.4 mm)
Minimum Overall Length (NOM)	35.670 in(906.0 mm)
Nominal Length (NOM)	36.000 in(914.4 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Outside Bulb Diameter (MIN)	35.670 in(906.0 mm)
Max Base Face to Base Face (A) (NOM)	35.220 in(894.6 mm)
Face to End of Opposing Pin (B) (MIN)	35.400 in(899.2 mm)
Face to End of Opposing Pin (B) (MAX)	35.500 in(901.7 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	35.670 in(906.0 mm)

PRODUCT INFORMATION

Product Code	15984
Description	F25T8SP41ECOCVG
ANSI Code	1002-1
Standard Package	Case
Standard Package GTIN	10043168159842
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	24
Package	
UPC	043168159845

