



GE
Lighting



80066 - F25T12/SP30/ECO

GE Ecolux® T12

- Passes TCLP, which can lower disposal costs.



High Color Rendering



CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

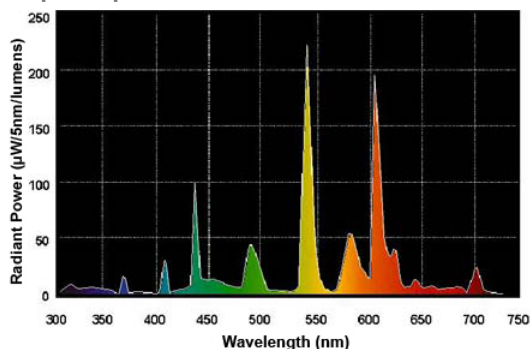

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T12
Rated Life (NOM)	18000.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	4.95 mg
Picograms of Mercury (NOM)	154.2 pg
Additional Info	TCLP compliant
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2300.0
Mean Lumens (NOM)	2140.0
Nominal Initial Lumens per Watt (NOM)	92.0
Color Temperature (NOM)	3000.0 K
Color Rendering Index (CRI) (NOM)	78.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	25.0
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	36.000 in(914.4 mm)
Nominal Length (NOM)	36.000 in(914.4 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)

PRODUCT INFORMATION

Product Code	80066
Description	F25T12/SP30/ECO
Standard Package	Case
Standard Package GTIN	10043168800669
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168800662