



# TUV T8

## TUV 75W HO T8

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Product data

#### • General Characteristics

System Description	High Output
Cap-Base	G13
Bulb	T8 [T8]
Main Application	Disinfection
Useful Life	9000 hr

#### • Light Technical Characteristics

Color Designation (text)	-
--------------------------	---

#### • Electrical Characteristics

Watts	75 W
Lamp Wattage Technical	75 W
Lamp Voltage	110 V
Lamp Current	0.84 A

#### • Environmental Characteristics

Mercury (Hg) Content	2.0 mg
----------------------	--------

#### • UV-related Characteristics

UV-C Radiation	25.5 W
----------------	--------

#### • Product Dimensions

Base Face to Base Face A	1199.4 (max) mm
Insertion Length B	1204.1 (min), 1206.5 (max) mm
Overall Length C	1213.6 (max) mm
Diameter D	28 (max) mm

#### • Product Data



Product number	290908
Full product name	TUV 75W HO 1SL
Short product name	TUV 75W HO 1SL/6
Pieces per Sku	1
eop_pck_cfg	6
Skus/Case	6
Bar code on pack	8711500618511
Bar code on case	8711500618528
Logistics code(s)	928049404003
eop_net_weight_pp	173.000 gr

# PHILIPS

## Dimensional drawing


### TUV 75W HO T8

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TUV TL-D 75W HO	1199.4	1204.1	1206.5	1213.6	28

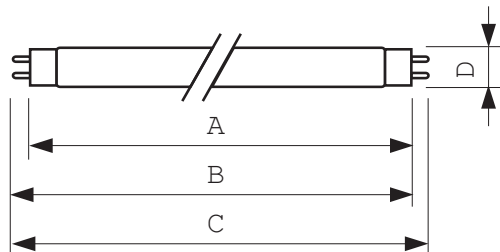

G13

## Photometric data

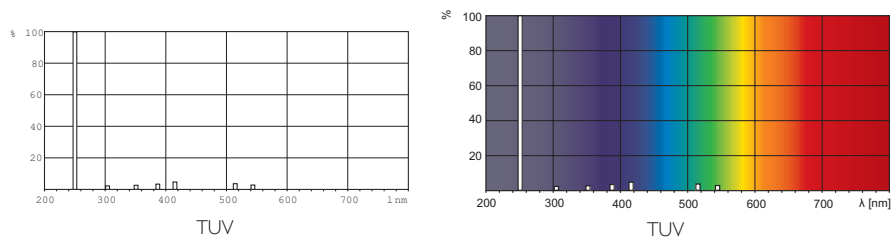

© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, February 1  
data subject to change