




GE
Lighting

23661 - F40/SP30/U6/CVG

GE covRguard® Mod-U-line® T12 - Shatter-Resistant

• A shatter resistant lamp encased in a 15 ml Lexan sleeve. Complies with FDA food code 6-202 and 21CFR 110.20. NSF and UL certified. Blocks UV lamp emissions from 380 to 180 nm.

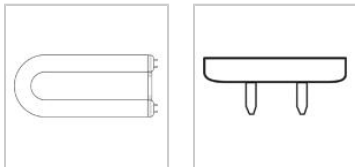

CAUTIONS & WARNINGS

Caution


- Improper handling may cause breakage.
 - Do not carry lamp by bracket.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

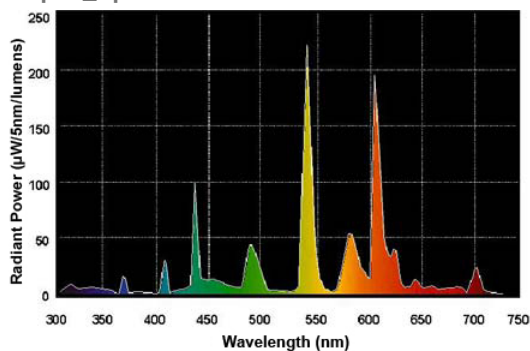

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - U-Shaped
Bulb	T12
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	14000.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	30.0 mg
Picograms of Mercury (NOM)	794.5 pg
Primary Application	Shatter-Resistant;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2959.0
Mean Lumens (NOM)	2697.0
Nominal Initial Lumens per Watt (NOM)	73.975
Color Temperature (NOM)	3000.0 K
Color Rendering Index (CRI) (NOM)	70.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	40.0
---------------	------

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	22.500 in(571.5 mm)
Nominal Length (NOM)	22.500 in(571.5 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)

PRODUCT INFORMATION

Product Code	23661
Description	F40/SP30/U6/CVG
Standard Package	Case
Standard Package GTIN	10043168236611
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168236614