



GE  
Lighting

## 23085 - F64T12/D 15PK

GE Daylight T12



High Color Rendering



### GENERAL CHARACTERISTICS

|                            |                               |
|----------------------------|-------------------------------|
| Lamp Type                  | Linear Fluorescent - Straight |
| Bulb                       | Linear                        |
| Base                       | T12                           |
| Base                       | Single Pin (Fa8)              |
| Rated Life (NOM)           | 10000.0 h                     |
| Bulb Material              | Soda lime                     |
| Mercury Content (NOM)      | 90.0 mg                       |
| Picograms of Mercury (NOM) | 2960.5 pg                     |
| Primary Application        | Full Wattage                  |

### PHOTOMETRIC CHARACTERISTICS

|                                       |          |
|---------------------------------------|----------|
| Initial Lumens (NOM)                  | 3300.0   |
| Mean Lumens (NOM)                     | 3040.0   |
| Nominal Initial Lumens per Watt (NOM) | 66.0     |
| Color Temperature (NOM)               | 6500.0 K |
| Color Rendering Index (CRI) (NOM)     | 75.0     |

### ELECTRICAL CHARACTERISTICS


|                                         |      |
|-----------------------------------------|------|
| Wattage (NOM)                           | 50.0 |
| Cathode Resistance Ratio - Rh/ Rc (MIN) | 4.25 |
| Current Crest Factor (MAX)              | 1.7  |

### DIMENSIONS

|                                    |                      |
|------------------------------------|----------------------|
| Maximum Overall Length (MOL) (NOM) | 64.000 in(1625.6 mm) |
| Nominal Length (NOM)               | 64.000 in(1625.6 mm) |
| Bulb Diameter (DIA) (NOM)          | 1.500 in(38.1 mm)    |

### PRODUCT INFORMATION

|                                  |                |
|----------------------------------|----------------|
| Product Code                     | 23085          |
| Description                      | F64T12/D 15PK  |
| Standard Package                 | Case           |
| Standard Package GTIN            | 10043168230855 |
| Standard Package Quantity        | 15             |
| Sales Unit                       | Unit           |
| No Of Items Per Sales Unit       | 1              |
| No Of Items Per Standard Package | 15             |
| UPC                              | 043168230858   |

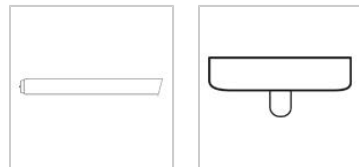

### CAUTIONS & WARNINGS

#### Caution


- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use excessive force when installing lamp.

#### Warning

- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.

### GRAPHS & CHARTS

#### Graphs\_Spectral Power Distribution

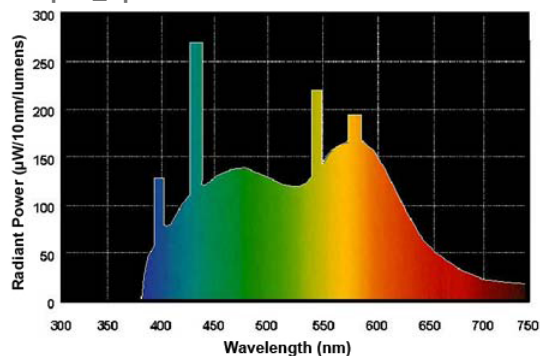

#### Graphs\_Lamp Mortality

