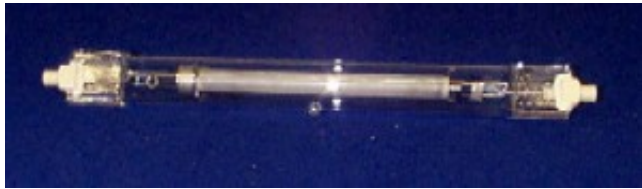


Product 67527**Number:****Order** LU400T7/RSC**Abbreviation:****General** 400W LUMALUX high pressure sodium HID lamp, RX7S**Description:** based, T7 bulb, universal burn, coated, 2100K**Product Information**

Abbrev. With Packaging Info.	LU400T7RSC 10/CS 1/SKU
ANSI Code	S51
Approx. Lumens (initial - horizontal)	45000
Approx. Lumens (mean - horizontal)	41400
Arc Length (in)	3.17
Arc Length (mm)	80.4
Average Rated Life - Horizontal (hr)	24000
Average Rated Life - (hr)	24000
Avg Rated Life (hrs)	24000
Base	RX7S RRSC
Bulb	T7
Color Rendering Index (CRI)	21
Color Temperature/CCT (K)	2100
Diameter (in)	0.876
Diameter (mm)	22.25
Family Brand Name	Lumalux®
Fixture Requirement	E
Hot Restrike Time (min)	1 MIN
Lamp Finish	Clear
Light Center Length - LCL (in)	5
Light Center Length - LCL (mm)	127
Maximum Base Temperature - Fahrenheit	347
Maximum Base Temperature - Celsius	175
Maximum Bulb Temperature - Fahrenheit	1504
Maximum Bulb Temperature - Celsius	800
Maximum Overall Length - MOL (in)	10.06
Maximum Overall Length - MOL (mm)	256
Nominal Voltage (V)	100.00
Nominal Wattage (W)	400.00
Operating Position	Horizontal
Warm-up Time (min)	5-6 MINUTES

Footnotes

- Use with 4000V pulse rated sockets only.
- E = Lamps classified as E-type are to be used **ONLY** in suitably enclosed luminaries. See lamp warning.