





GE
Lighting

72605 - LU70/D/H/ECO


GE Ecolux® Lucalox® High Pressure Sodium ED23.5

• Passes TCLP, which can lower disposal costs.

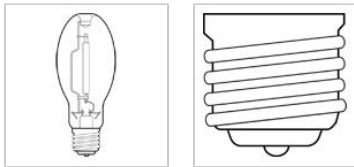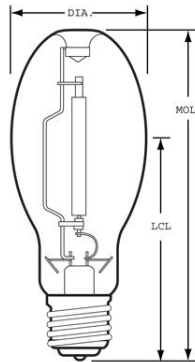

GRAPHS & CHARTS

Graphs_Lumen Maintenance

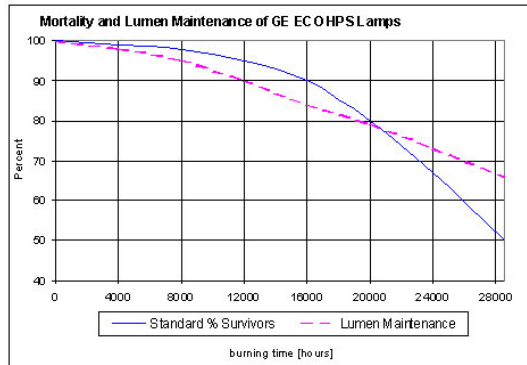

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium
Bulb	ED23.5
Base	Mogul Screw (E39)
Bulb Finish	Diffuse
Rated Life (NOM)	24000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Base Temperature (MAX)	210.0 °C
Bulb Temperature (MAX)	400.0 °C
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	5950.0
Mean Lumens (NOM)	5050.0
Nominal Initial Lumens per Watt (NOM)	85.0
Color Temperature (NOM)	1900.0 K
Color Rendering Index (CRI) (NOM)	22.0

ELECTRICAL CHARACTERISTICS

Amps (NOM)	1.6 A
Wattage (NOM)	70.0
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	110.0 V
Warm Up Time to 90% (NOM)	4.0 min
Hot Restart Time to 90% (NOM)	1.0 min

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	7.750 in(196.8 mm)
Bulb Diameter (DIA) (MAX)	2.938 in(74.6 mm)
Bulb Diameter (DIA) (NOM)	2.950 in(74.9 mm)
Light Center Length (LCL) (NOM)	5.000 in(127.0 mm)

PRODUCT INFORMATION

Product Code	72605
Description	LU70/D/H/ECO
ANSI Code	S62
Standard Package	Case
Standard Package GTIN	10043168726051
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168726054